

CNE - CSE 6 poles + ⊕ 16A - 500V




enclosures: **size "44.27"**

- standard** page: 176 ÷ 179
- for 180 °C** page: 180
- aggressive environments** page: 181
- EMC** page: 182


panel supports:
COB page: 258 ÷ 259

- features according to EN 61984:
16A 500V 6kV 3
- UL, CSA, CCC, GL certified
- for maximum current load, see the insert load curve section on page 31

inserts, screw terminal connections

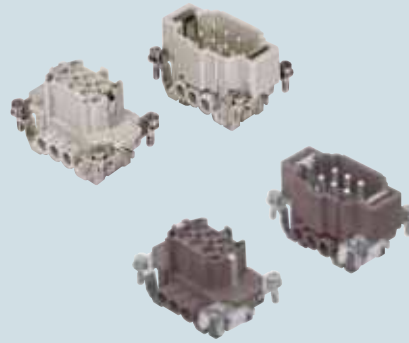

inserts, spring terminal connections




description	part No.	part No.
indirect, with plate 1) female inserts with female contacts male inserts with male contacts	CNEF 06 T CNEM 06 T	
direct, without plate 2) female inserts with female contacts male inserts with male contacts	CNEF 06 TX CNEM 06 TX	
indirect, with plate 1), use in up to 180 °C female inserts with female contacts, brown male inserts with male contacts, brown	CNEF 06 RYT * CNEM 06 RYT *	
spring terminal female inserts with female contacts male inserts with male contacts		CSEF 06 CSEM 06

- 1) for non-prepared conductors
- 2) for bush terminal conductors

* CNE...RY version without plastic wire insertion guide cover available on request.




connection with spring terminal

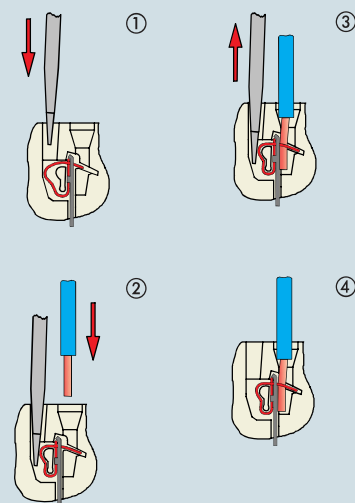


dimensions indicated are not binding and may be changed without notice

dimensions in mm




contacts side (front view)




- inserts with plate, for section conductors:
0.75 ÷ 2.5 mm² - AWG 18 ÷ 14
- inserts without plate, for section conductors:
0.25 ÷ 2.5 mm² - AWG 24 ÷ 14
- torsion couple recommended for conductor fastening screws and stripping length see section feature of inserts on page 13

dimensions in mm



contacts side (front view)



- inserts for section conductors:
0.14 ÷ 2.5 mm² - AWG 26 ÷ 14
- stripping length see section feature of inserts on page 13